

User's Guide 5522

ENGLISH

Congratulations upon your selection of this CASIO watch.

Important!

- This manual provides a brief overview of your watch.

E-1

For a full Operation Guide and Q&A information about this product, go to the website below.
<http://world.casio.com/manual/wat/>




Configuring Home City, Time and Date Settings

- Configure Home City and summer time settings first. After that, configure time and date settings.
1. In the Timekeeping Mode, hold down (A) until the flashing SET Hold indicator disappears from the display and the currently selected city code flashes on the display.

E-2

2. Press (C) to move the flashing in the sequence shown below to select a setting.

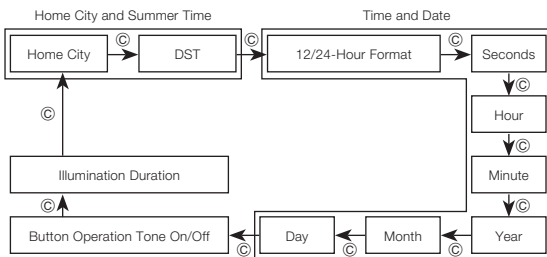

E-4

3. Use (D) and (B) to change the selected setting.


Screen	To do this:	Do this:
TYO	Change the city code	Use (D) (East) and (B) (West).
OFF	Toggle between Daylight Saving Time (ON) and Standard Time (OFF)	Press (D).
12H	Toggle between 12-hour (12H) and 24-hour (24H) timekeeping	Press (D).
36	Reset the seconds to 00	Press (D).
10:08	Change the hour or minute	Use (D) (+) and (B) (-) to change these settings. • Holding down either button scrolls at high speed.
2017	Change the year	
6-30	Change the month or day	

4. Press (A) to exit the setting mode.

E-5

Mode Selection and Operations

- Press (C) to change the mode.
- To return to the Timekeeping Mode from any other mode, hold down (C) for about two seconds.

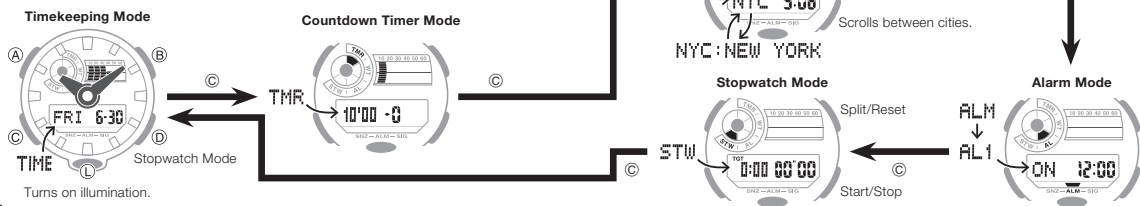

E-6

E-7

Misaligned Hands

The analog hands may become misaligned as described below if the watch is exposed to strong magnetism, impact, or other abnormal conditions.
 • Analog time and digital time are different from each other
 If this happens, refer to "Hand Home Position Adjustment" in the Operation Guide available at the CASIO website and adjust the hand alignment.

E-8

Specifications

- Accuracy at normal temperature:** ±15 seconds a month
- Digital Timekeeping:** Hour, minutes, seconds, p.m. (P), month, day, day of the week
- Time format: 12-hour and 24-hour
- Calendar system: Full Auto-calendar pre-programmed from the year 2000 to 2099
- Other: Home City code (can be assigned one of 48 city codes); Standard Time/Daylight Saving Time (summer time)
- Analog Timekeeping:** Hour, minutes (hand moves every 20 seconds)
- Stopwatch:**
 - Measuring unit: 1/100 second
 - Measuring capacity: 23:59:59.99"
 - Measuring modes: Elapsed time, split time, two finishes, Direct timing start from the Timekeeping Mode, Target Time Alarm

E-9

Countdown Timer:

Measuring unit: 1/10 second
 Countdown range: 60 minutes
 Countdown start time setting range: 1 to 60 minutes (1-minute increments)

World Time: 48 cities (31 time zones)

Other: Daylight Saving Time/Standard Time; Home City/World Time City switching

Alarms: 5 Daily alarms (with 1 snooze alarm); Hourly time signal

Illumination: LED (light-emitting diode); Selectable illumination duration (approximately 1.5 seconds or 3 seconds)

Other: Button operation tone on/off; Moving the Hands to View the Digital Display

Power Supply: One lithium battery (Type: CR2016)

Approximate battery operating time: 5 years under the following conditions:


- Alarm: 10 seconds/day
- 1 illumination operation (1.5 seconds) per day

Frequent use of illumination runs down the battery.

Specifications are subject to change without notice.

E-10

E-11

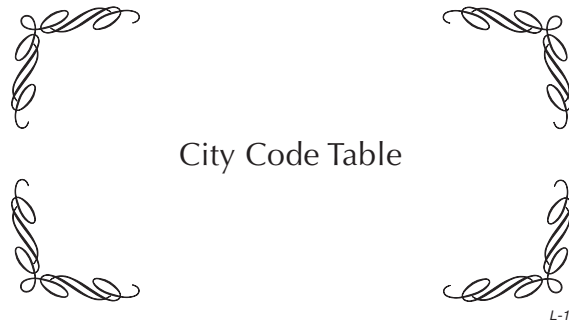

L-1

City Code Table

City Code	City	UTC Offset/ GMT Differential	City Code	City	UTC Offset/ GMT Differential
PPG	Pago Pago	-11	FEN	Fernando de Noronha	-2
HNL	Honolulu	-10	RAI	Prala	-1
ANC	Anchorage	-9	UTC		
YVR	Vancouver	-8	LIS	Lisbon	0
LAX	Los Angeles		LON	London	
YEA	Edmonton	-7	MAD	Madrid	
DEN	Denver		PAR	Paris	
MEX	Mexico City	-6	ROM	Rome	+1
CHI	Chicago		BER	Berlin	
NYC	New York	-5	STO	Stockholm	
YHZ	Halifax	-4	ATH	Athens	
YYT	St. John's	-3.5	CAI	Cairo	+2
BUE	Buenos Aires		JRS	Jerusalem	
RIO	Rio De Janeiro	-3			

L-2

City Code	City	UTC Offset/ GMT Differential
MOW	Moscow	+3
JED	Jeddah	
THR	Tehran	+3.5
DXB	Dubai	+4
KBL	Kabul	+4.5
KHI	Karachi	+5
DEL	Delhi	+5.5
KTM	Kathmandu	+5.75
DAC	Dhaka	+6
RGN	Yangon	+6.5
BKK	Bangkok	+7
SIN	Singapore	
HKG	Hong Kong	
BJS	Beijing	+8
TPE	Taipei	

City Code	City	UTC Offset/ GMT Differential
SEL	Seoul	+9
TYO	Tokyo	
ADL	Adelaide	+9.5
GUM	Guam	+10
SYD	Sydney	
NOU	Noumea	+11
WLG	Wellington	+12

- This table shows the city codes of this watch (As of July 2016).
- The rules governing global times (GMT differential and UTC offset) and summer time are determined by each individual country.

L-3